


APT. TYPE 'E' LEFT (TYP.)

APT. TYPE 'E' RIGHT (TYP.)


1 APT. TYPE 'E': LBP ABATEMENT & GENERAL DEMOLITION PLAN AT BASEMENT LEVEL
SCALE: 1/4" = 1'-0"

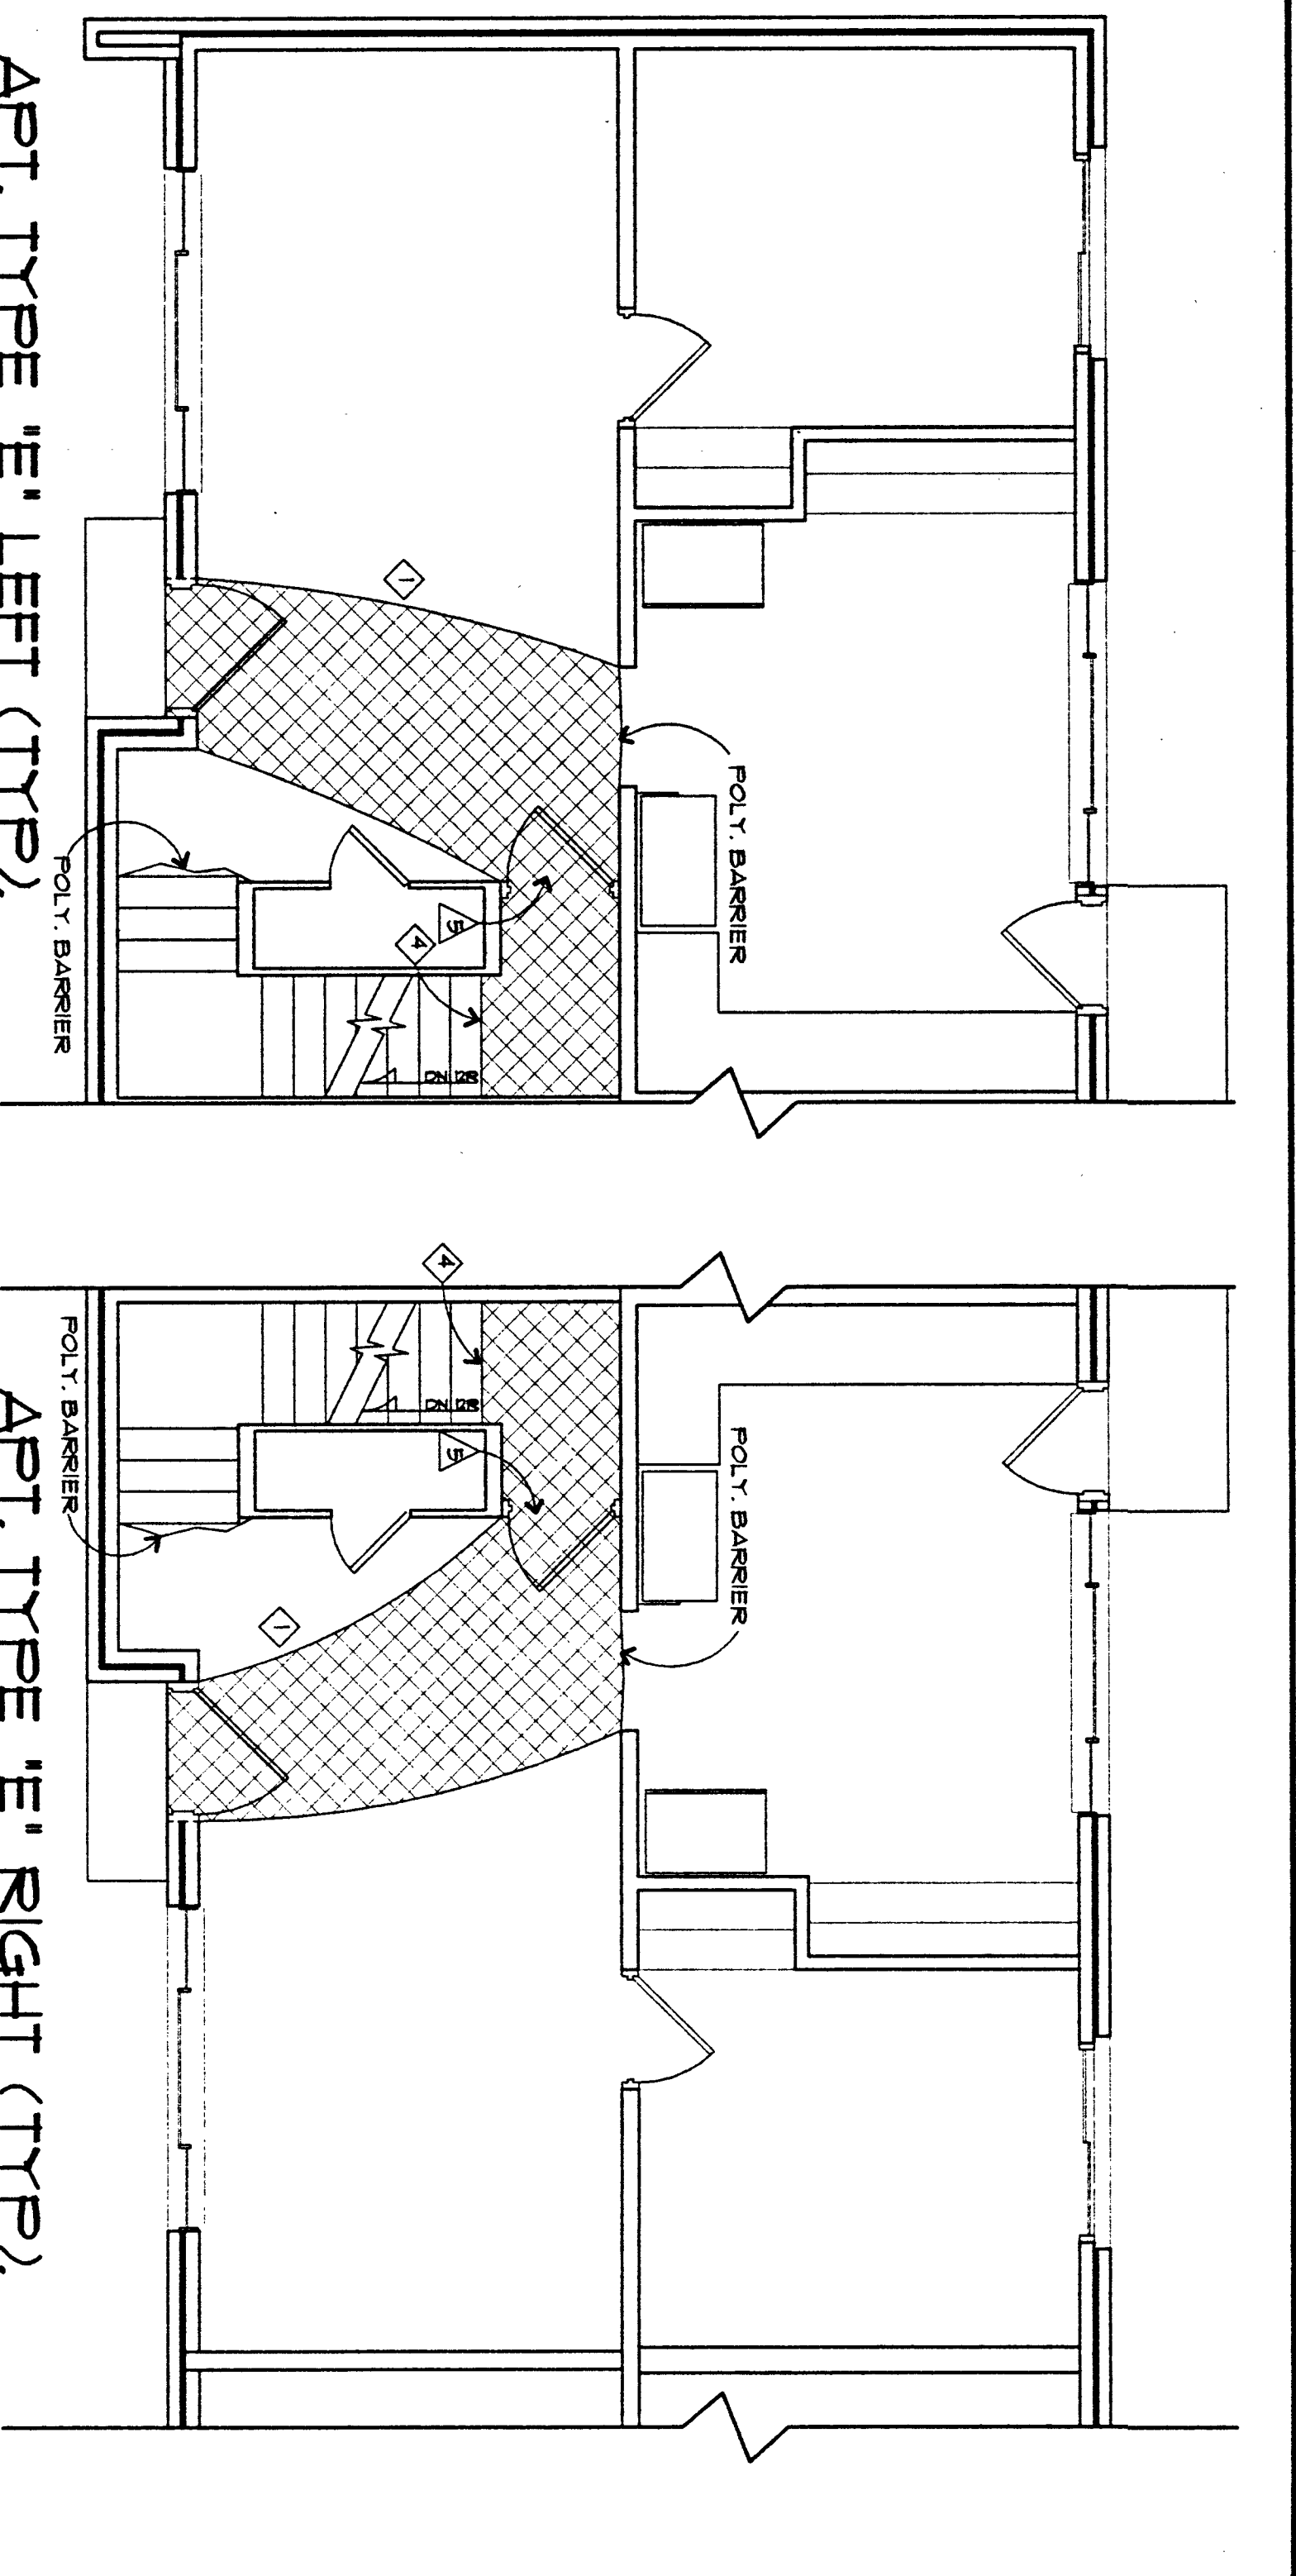

APT. TYPE 'E' LEFT (TYP.)

APT. TYPE 'E' RIGHT (TYP.)

3 APT. TYPE 'E': FIRST FLOOR ACCESS & CONTAINMENT PLAN
SCALE: 1/4" = 1'-0"

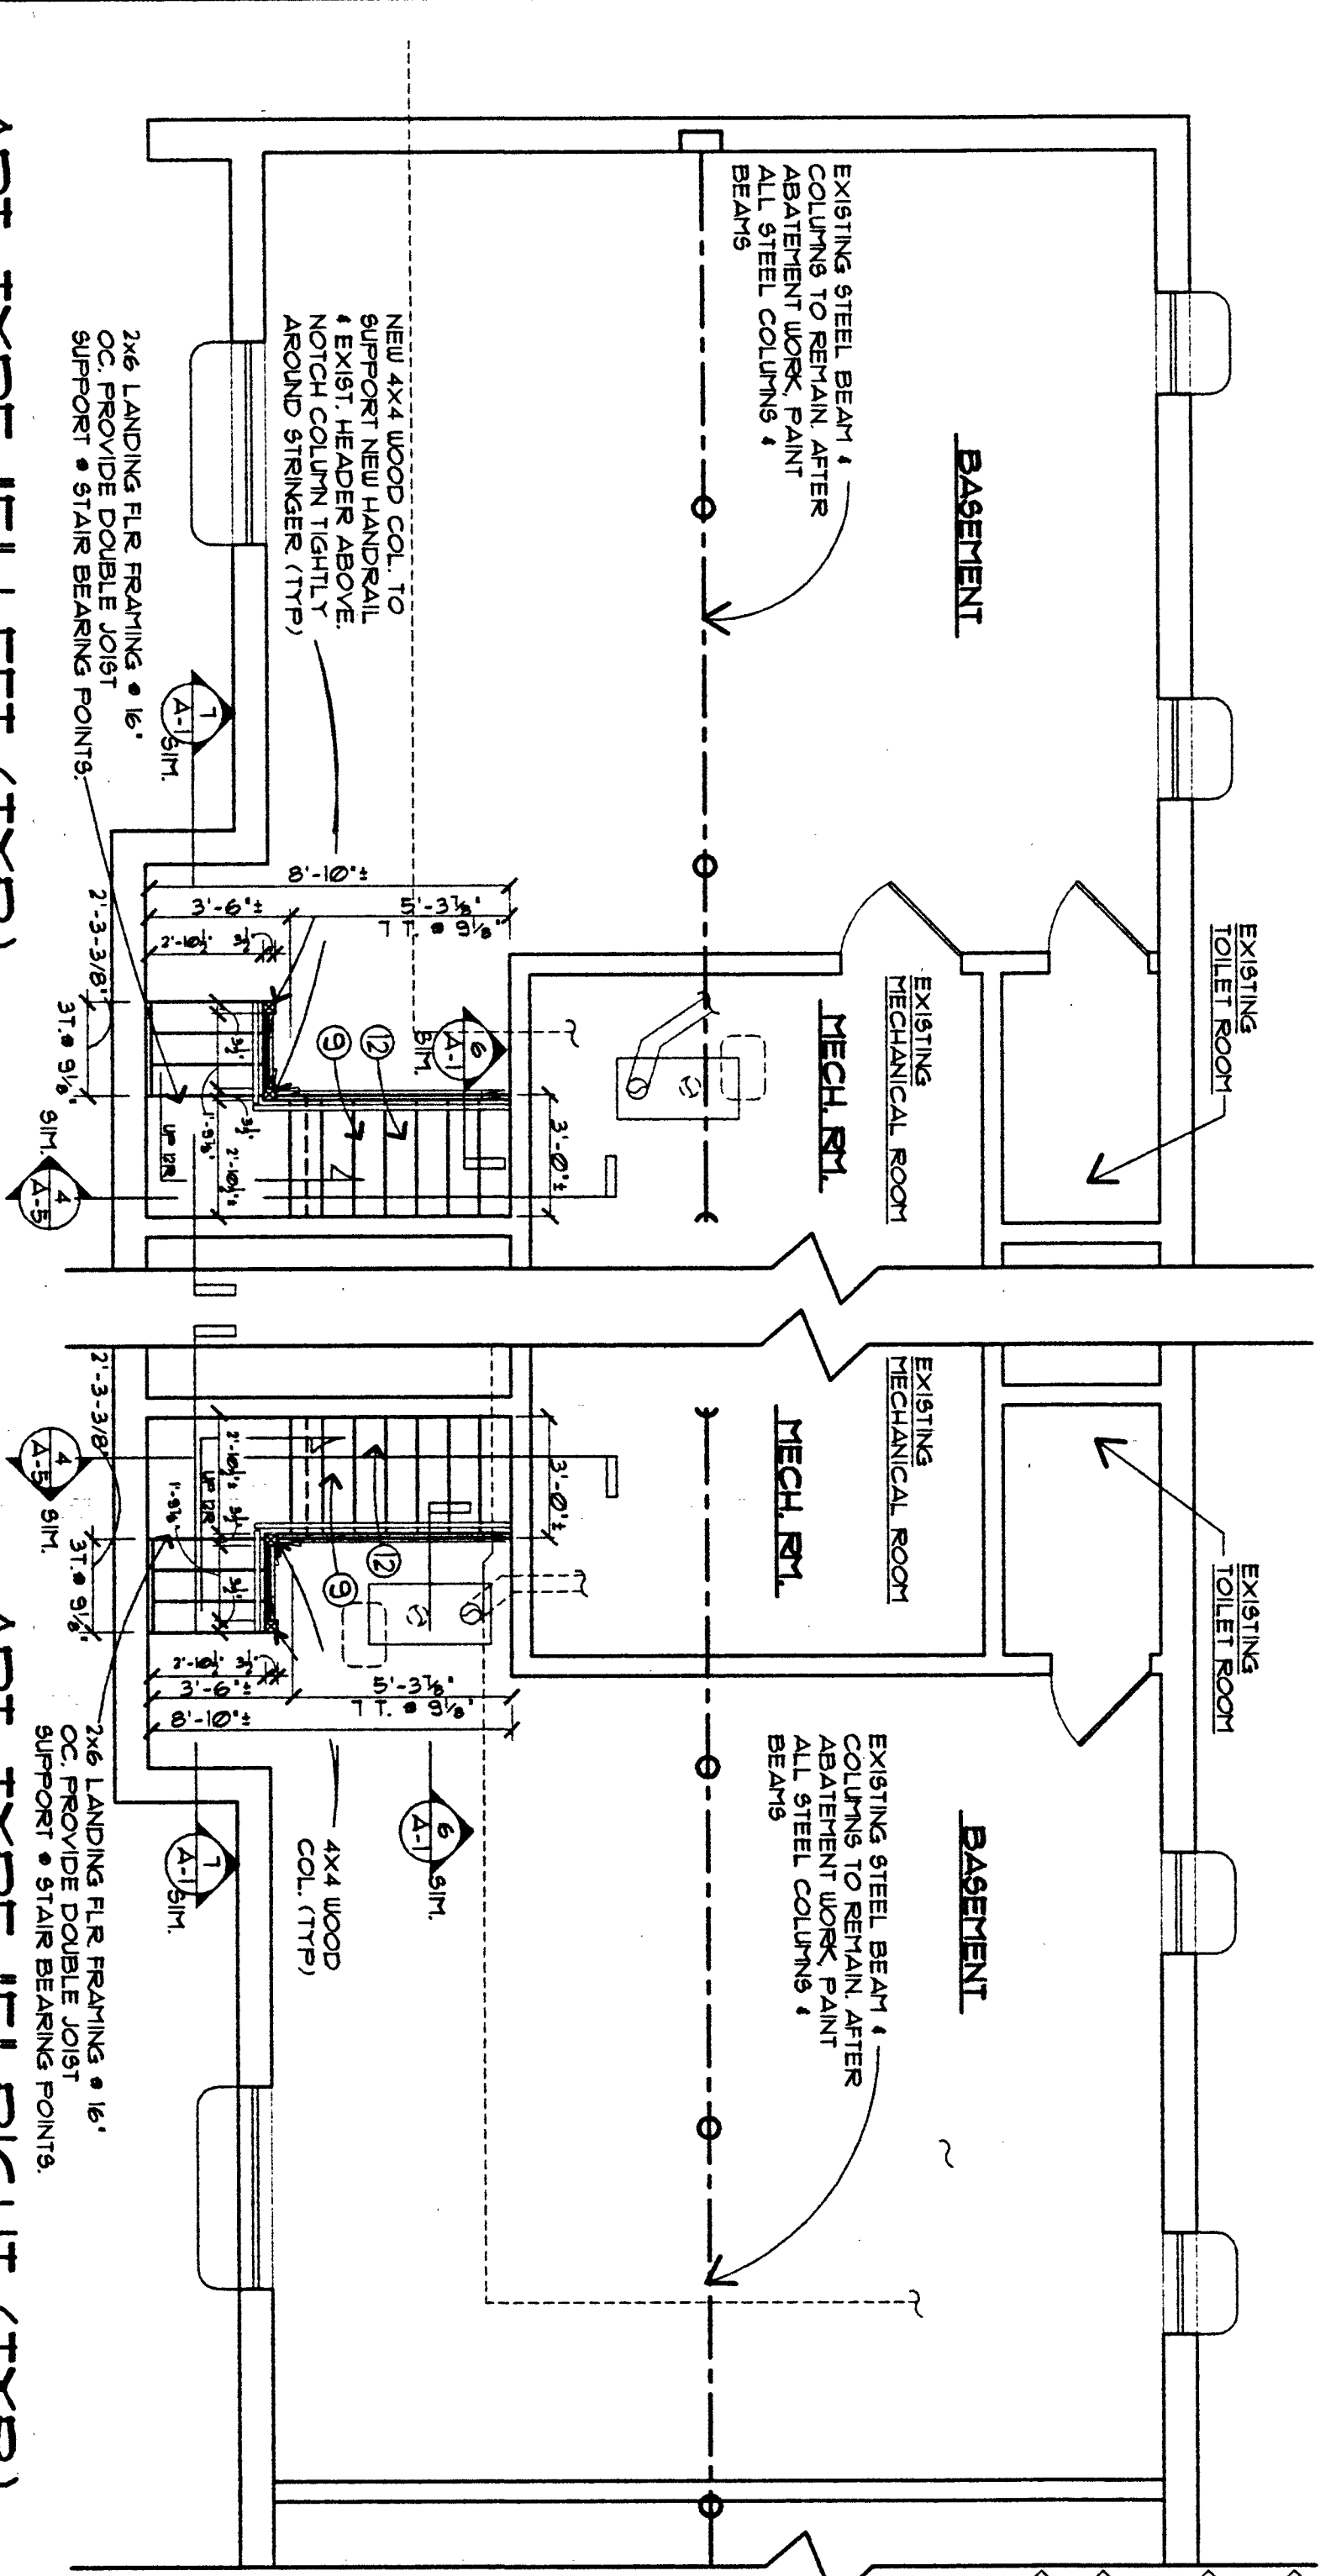


APT. TYPE 'E' LEFT (TYP.)

APT. TYPE 'E' RIGHT (TYP.)

2 APT. TYPE 'E': NEW CONSTRUCTION AT BASEMENT
SCALE: 1/4" = 1'-0"

- GENERAL NOTES:**
- CONTRACTOR SHALL MAINTAIN FLOOR DEBRIS AND GUTS PITS FREE FROM THE EXIST. BOILER WATER SUPPLY PIPING, VIF. ACCUMULATION OF DEBRIS DURING ALL ABATEMENT, DEMO, AND NEW CONSTRUCTION OPERATIONS. WASTE OR DEBRIS WASHED INTO THE BASEMENT STORM DRAINAGE SYSTEM SHALL BE REMOVED AND THE SYSTEM RESTORED TO A FREE-CONTRACT CONDITION BY THE RESPONSIBLE CONTRACTOR.
 - EXISTING ELEVATED COPPER SANITARY WASTE PIPING, EXACT LOCATION VARIES BY ADDRESS. FIELD VERIFY ACTUAL LOCATION.
 - EXISTING BOILER PACKAGE VENTING SYSTEM AND OVERHEAD EXPANSION TANK FIELD VERIFY ACTUAL CONDITIONS. BOILER VENTING SYSTEM ACCESS TO STRUCTURAL STEEL & RAIN WORK AREAS (TYP).
 - EXISTING, FIELD VERIFY LOCATION AND QUANTITY VARY BY ADDRESS. FIELD VERIFY ACTUAL LOCATION AND QUANTITY. VERIFY EXISTING ACTUAL LOCATION, SIZE, AND DIMENSIONS.
 - FRESH AIR INTAKE PIPING, LIMITS ACCESS TO STRUCTURAL STEEL. FIELD VERIFY ACTUAL LOCATION AND CONFIGURATION VARIES BY ADDRESS.
 - FIELD VERIFY ACTUAL CONDITIONS.
 - EXIST. BOILER WATER SUPPLY PIPING, VIF.
 - ALTERNATE FRESH AIR INTAKE ORIENTATION.
 - CONTRACTOR SHALL BE RESPONSIBLE FOR CREATING A WORKSPACE FOR ABATEMENT WORK IN BASEMENT AND ACCESS TO BASEMENT END BASED PAINT FROM EXPOSED STRUCTURAL STEEL WITHIN MECHANICAL ROOM. SEE NOTE [THIS SHEET].
 - PROVIDE LOCAL HEPA FILTRATION ON ALL POWER TOOLS AND DAILY.
 - ACCESS TO BASEMENT WORK AREA SHALL BE LIMITED TO ABATEMENT WORKERS. UNAUTHORIZED REPRESENTATIVES OF THE NICKARAU ALLIANCE SHALL NOT BE ALLOWED TO ENTER THE BASEMENT WORK AREA. HANG PERMITIVE POLY AIR LOCK ON BASEMENT DOOR FRAMED TO REMAIN IN PLACE UNTIL CLEARANCE IS ACHIEVED. ORIGINAL PASSAGEWAY HARDWARE SHALL BE RE-INSTALLED IN ORIGINAL CONDITION AT CONCLUSION OF NEW STAIR FINISH.
 - INDICATED AS Δ ON PLANS.
 - IN OCCUPIED UNITS RESIDENTS' PROPERTY MAY BE IN AREA. CARE MUST BE TAKEN TO PRETECT RESIDENTS' PROPERTY.
 - CONTRACTOR SHALL BE RESPONSIBLE FOR CREATING A WORKSPACE FOR ABATEMENT WORK IN BASEMENT AND ACCESS TO BASEMENT END BASED PAINT FROM EXPOSED STRUCTURAL STEEL WITHIN MECHANICAL ROOM. SEE NOTE [THIS SHEET].
 - PROVIDE LOCAL HEPA FILTRATION ON ALL POWER TOOLS AND DAILY.
 - ACCESS TO BASEMENT WORK AREA SHALL BE LIMITED TO ABATEMENT WORKERS. UNAUTHORIZED REPRESENTATIVES OF THE NICKARAU ALLIANCE SHALL NOT BE ALLOWED TO ENTER THE BASEMENT WORK AREA. HANG PERMITIVE POLY AIR LOCK ON BASEMENT DOOR FRAMED TO REMAIN IN PLACE UNTIL CLEARANCE IS ACHIEVED. ORIGINAL PASSAGEWAY HARDWARE SHALL BE RE-INSTALLED IN ORIGINAL CONDITION AT CONCLUSION OF NEW STAIR FINISH.
 - INDICATED AS Δ ON PLANS.
 - WHERE MECHANICAL OR PLUMBING SYSTEMS, EQUIPMENT OR APPLIANCES ARE IN DIRECT CONTACT WITH ABATEMENT SURFACES, CONTRACTOR SHALL REMOVE LEAD BASED PAINT TO LIMITS OF CONTACT AREAS. CONTRACTOR SHALL NOT BE REQUIRED TO REMOVE SUCH MECHANICAL AND PLUMBING SYSTEMS.
 - URING REMOVAL OF LEAD ABATEMENT AND STAIR FASTENERS TO START OF LBP ABATEMENT AND VIF OR FRESH AIR INTAKE PIPING, CONTRACTOR SHALL PROVIDE PROTECTION FOR EXISTING MECHANICAL, PLUMBING, FASTER INTERFERING WITH ACCESS TO STRUCTURAL STEEL. PROVIDE MIN. TEMP. RELOCATION OF PIPING AS REQ. FOR ACCESS TO STEEL DURING LBP ABATEMENT ACTIVITIES. RESTORE ORIGINAL LOCATION AND QUANTITY BY ADDRESS.
 - REMOVE STAIR AND HANDRAIL SYSTEM COMPLETE INCLUDING 4x4" RAIL SUPPORT COLUMNS AND WOOD STAIR PARTITIONS AT BASEMENT LEVEL.
 - EXISTING HALF LANDING.
 - WHERE APARTMENT ADDRESS CONTAINS ALTERNATE BOILER PACKAGE LOCATION, ASSOCIATED PLUMBING AND MECHANICAL ACCESS TO STRUCTURAL STEEL LBP ABATEMENT WORK THIS LOCATION.
 - FIELD VERIFY ALL LOCATIONS BY ADDRESS WHERE SANITARY WASTE PIPING ENCLUSTERS ACCESS TO STRUCTURAL STEEL. (UNTIL 1-1/2" OF STRUCTURAL STEEL, SEE NOTE [THIS SHEET].
 - BOILER SUPPLY OR SPACE HEATING PIPING MAY ENCLUSTER ACCESS TO ABATEMENT SURFACES. SEE NOTE [THIS SHEET].
 - REMOVE EXIST. 4x4" WOOD COLUMN SUPPORTING DOUBLE HOIST FLOOR AND STRUCTURE ABOVE AS PART OF TEMPORARY SHORL AND DRIVING ABATEMENT & STAIR REPLACEMENT ACTIVITIES. INSTALL AND REMOVE COMPLETE SHORING SYSTEM TO ENSURE NO NOTICEABLE DEFLECTION OR DISTURBANCE OF EXISTING CONSTRUCTIONS.
 - FRESH AIR INTAKE PIPING MAY ENCLUSTER ACCESS TO ABATEMENT SURFACES. SEE NOTE [THIS SHEET].
 - REMOVE LEAD BASED PAINT IS REMOVED FROM STRUCTURAL STEEL, MECHANICAL ROOMS, AND PLUMBING SYSTEMS OR APPLIANCES ENCLUSTERS, LEAD TO ABATEMENT SURFACES. CONTRACTOR TO FIELD VERIFY ACTUAL CONDITIONS.
 - BOILER EXPANSION TANK ENGINEERS ACCESS TO ABATEMENT SURFACES. SEE NOTE [THIS SHEET].
 - DOMESTIC HOT AND COLD WATER PIPING SUPPORTED BY AND ENCLUSTER ACCESS TO TOP OF ABATEMENT SURFACES. SEE NOTE [THIS SHEET].
 - SHRINK TO NOTE # ABOVE. DOMESTIC HOT AND COLD WATER PIPING SUPPORTED BY AND ENCLUSTER ACCESS TO TOP OF ABATEMENT SURFACES. SEE NOTE [THIS SHEET].
 - WORK SHALL BE COMPLETED IN MINIMUM OF BEAM AND COLUMN CAN BE TEMPORARILY SUPPORTED BY HAND DURING LBP ABATEMENT AND NEW FINISH ACTIVITIES.
 - AT ALL STAIR, STAIR WALL, LANDING, AND HANDRAIL REMOVAL & PATCH DAMAGED EXISTING SURFACES TO REMAIN TO MATCH EXISTING.
 - REMOVE EXIST. 4x4" WOOD COLUMN SUPPORTING DOUBLE HOIST FLOOR AND STRUCTURE ABOVE AS PART OF TEMPORARY SHORL AND DRIVING ABATEMENT & STAIR REPLACEMENT ACTIVITIES. INSTALL AND REMOVE COMPLETE SHORING SYSTEM TO ENSURE NO NOTICEABLE DEFLECTION OR DISTURBANCE OF EXISTING CONSTRUCTIONS.
 - FRESH AIR INTAKE PIPING MAY ENCLUSTER ACCESS TO ABATEMENT SURFACES. SEE NOTE [THIS SHEET].
 - REMOVE LEAD BASED PAINT IS REMOVED FROM STRUCTURAL STEEL, MECHANICAL ROOMS, AND PLUMBING SYSTEMS OR APPLIANCES ENCLUSTERS, LEAD TO ABATEMENT SURFACES. CONTRACTOR TO FIELD VERIFY ACTUAL CONDITIONS.

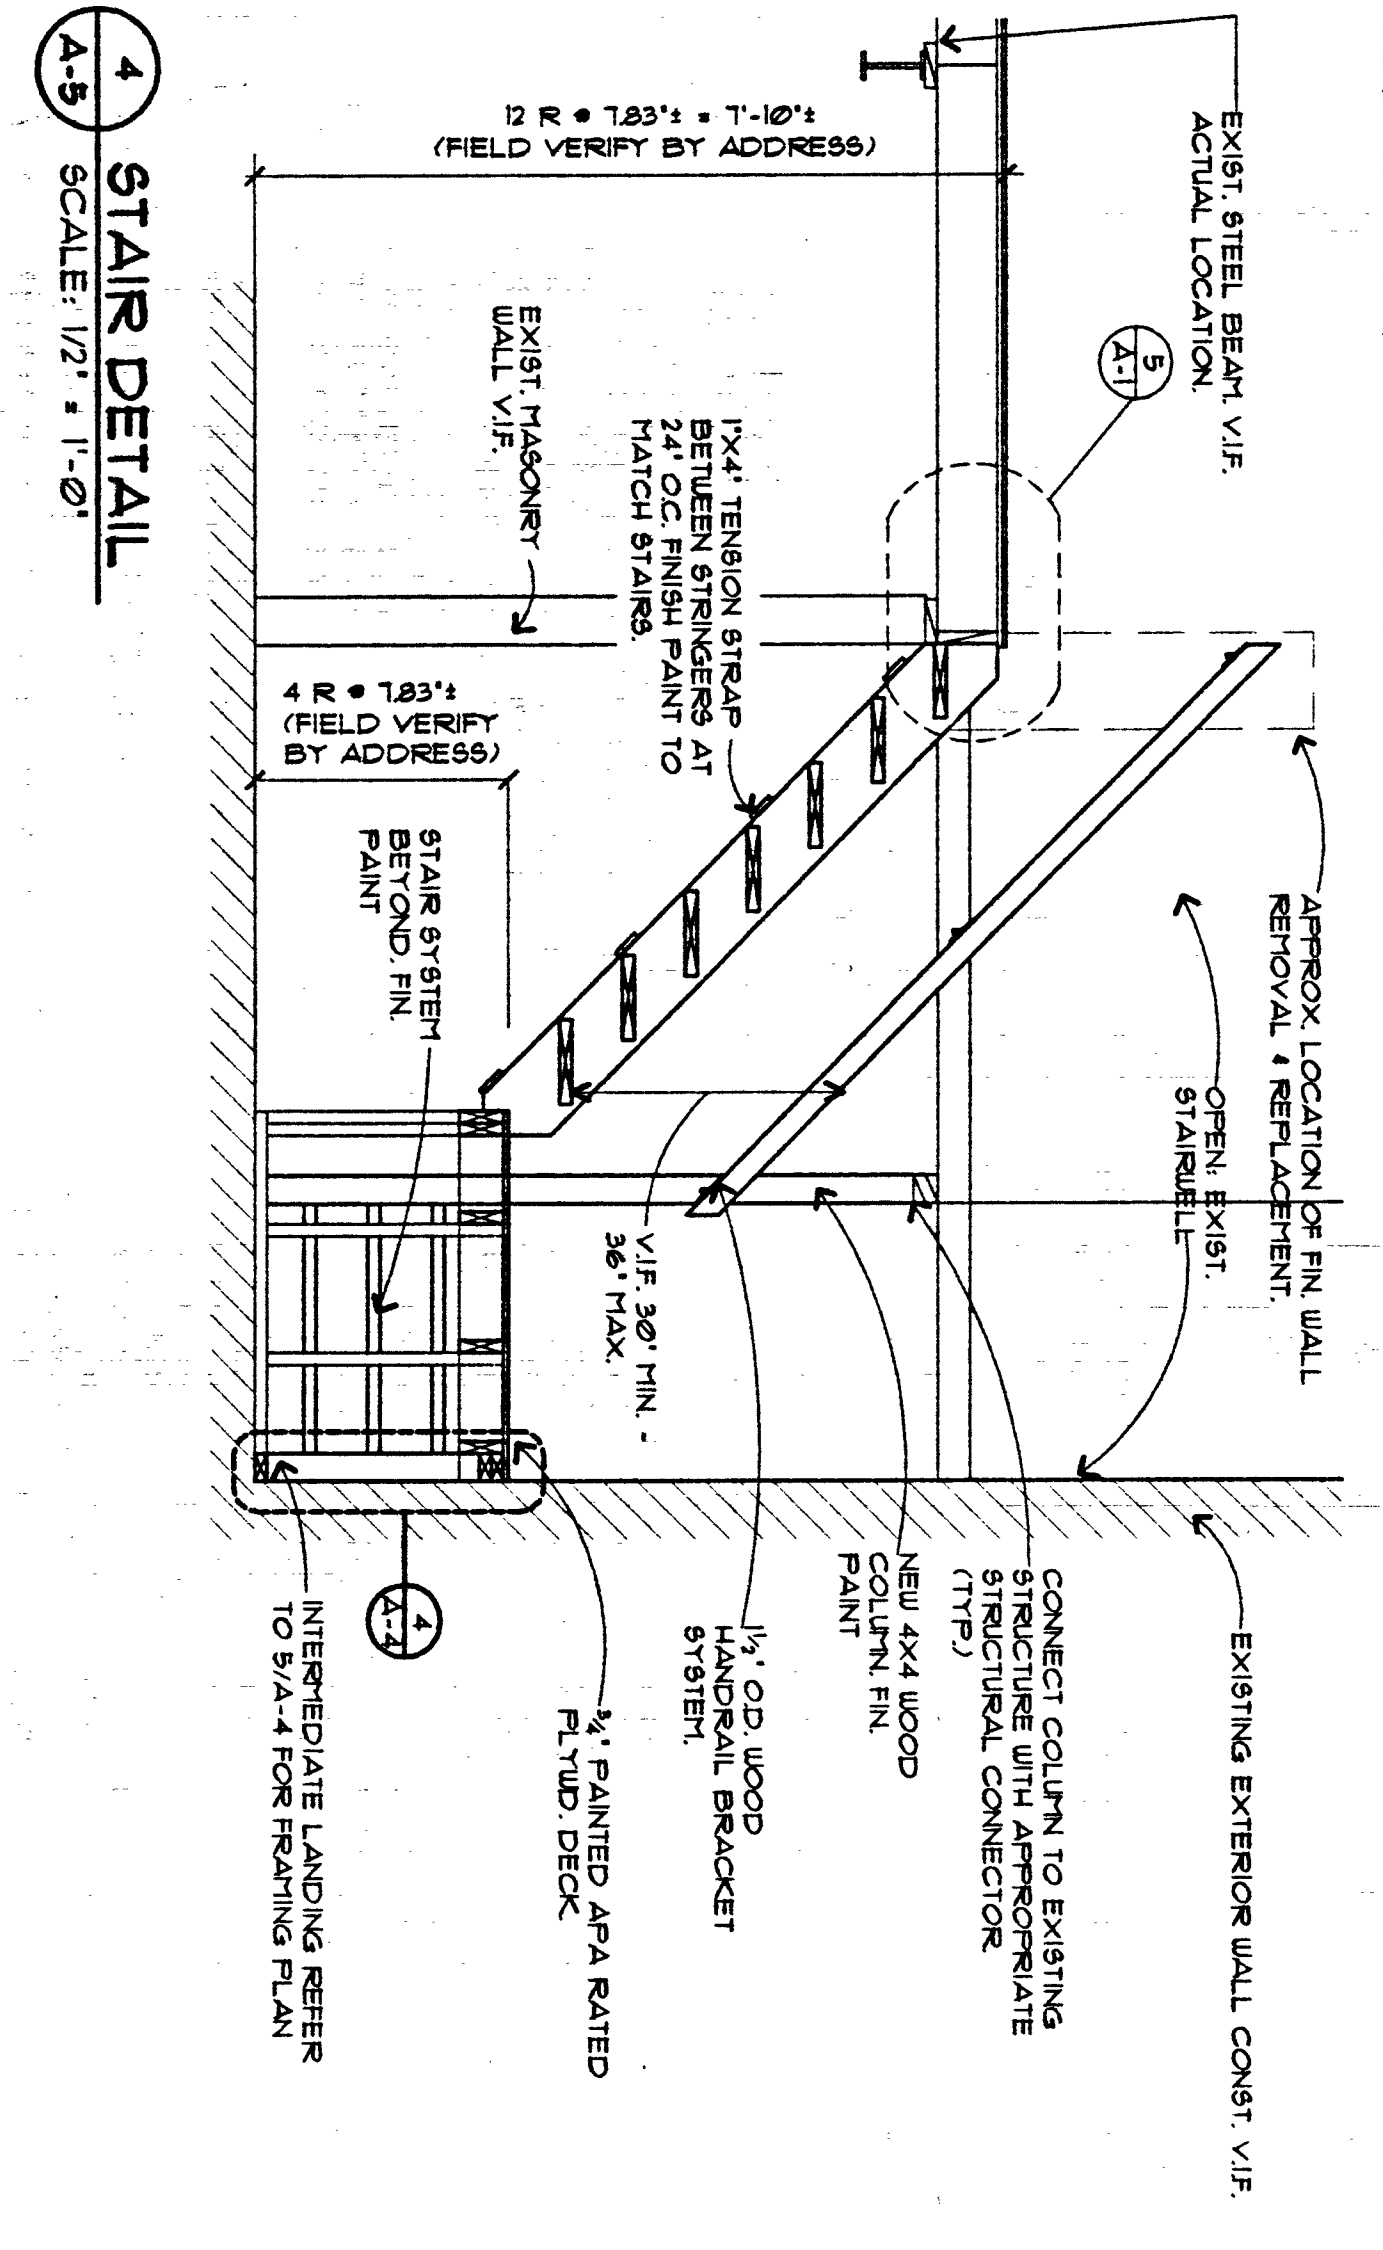

4 STAIR DETAIL
SCALE: 1/2" = 1'-0"

<p>Architecture Unlimited</p> <p>Project: 716-892-1944 Project: 3000 State Street North Tonawanda, New York 14120</p>	
<p>Project LEAD BASED PAINT ABATEMENT AND BASEMENT STAIR REPLACEMENT AT JORDAN GARDEN'S DEVELOPMENT NAGARA FALLS HOUSING AUTHORITY NAGARA FALLS, NEW YORK</p>	
<p>Drawing Title APARTMENT TYPE E PLANS AND DETAILS</p>	
<p>Project No. 000-0002 Date: 01/09/01 Scale: 1/4" = 1'-0"</p>	<p>Drawn by: JTH/KOZ Checked by: JTH Date: 01/09/01</p>
<p>Sheet No. A-5</p>	